



Packaging Dynamics, Ltd.


35B Carlough Road ♦ Bohemia, New York 11716

Telephone: (631) 563-4499 ♦ Fax: (631) 563-4893

Flow Meter Technology

Description: An economical, easy to use and accurate flow measurement system.

Principle of Operation

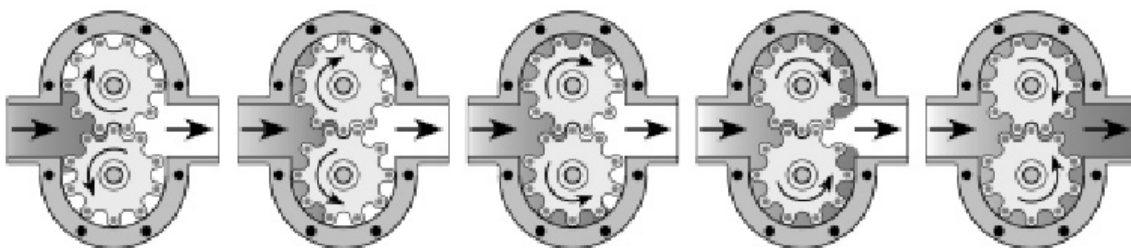

Positive displacement flowmeters use two rotating impellers driven by the flowing liquid. Magnets imbedded in the impellers activate a non-intrusive sensor which generates a pulsed output signal. Each pulse represents a known volume of liquid that is captured between the lobes of the impellers. A K-Factor converts the pulses into engineering units for remote data collection and digital display.

Features:

- Various Flowmeter Sizes
- Stainless Steel Construction
- Superior Reliability and Accuracy,
+/- 0.5% or better
- Only Two Moving Parts
- Bearingless Design
- Handles Viscosities from Water Thin to
Thick Creams
- No Motors or Clutch Brakes
- Easy to Install and Maintain
- Operating Temperatures up to
250 Degree F
- Wide Range Applications
- Non-Intrusive Sensor
- Not Limited to Capacity

